





Non-Metal Reinforced Laminates

Technical Data Sheet 185

Standard Grades

- GHN 
- GHP 
- GHW 
- GRAFKOTE® 

Product Overview

GRAFOIL Grade GHN is an unbranded laminate made with GRAFOIL Grade TG-337 flexible graphite, thermally bonded to both faces of a plastic insert. It is not certified to any industry standards. Similar to Grade GHP, but with low-cost natural graphite! Grade GHN provides excellent long term sealing, good load retention, and easy removal of frequently rebuilt flanges. Surface identifiable, laminate is branded with the GRAFOIL grade and source guarantee.




Applications

- General gasket service
- Blind flange gaskets
- Replacement for
 - current compressed sheet
 - beater-addition-type sheet
- Other non-asbestos gasketing materials

GRAFOIL
Grade TG-337

Plastic Insert

GRAFOIL
Grade TG-337

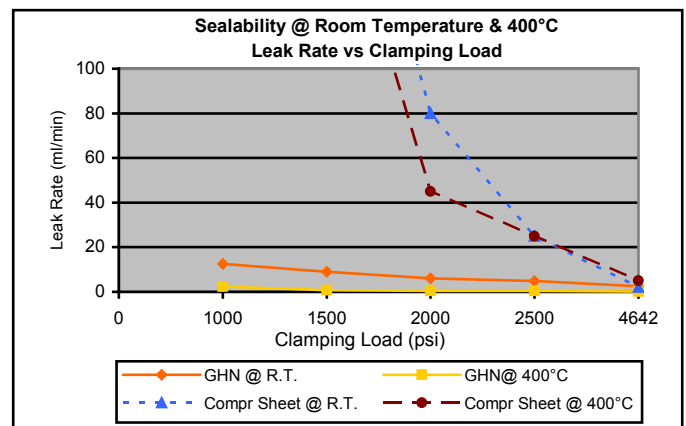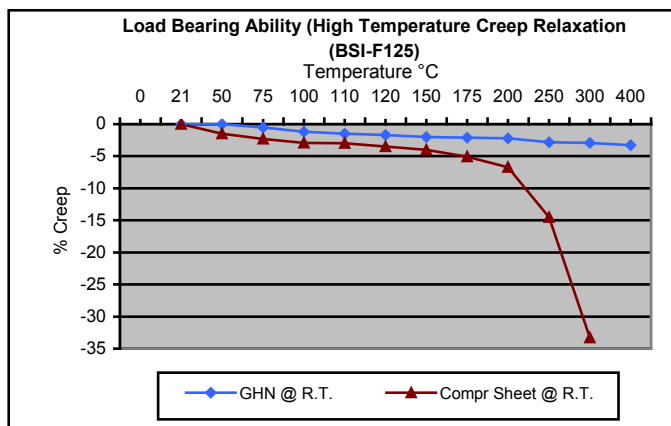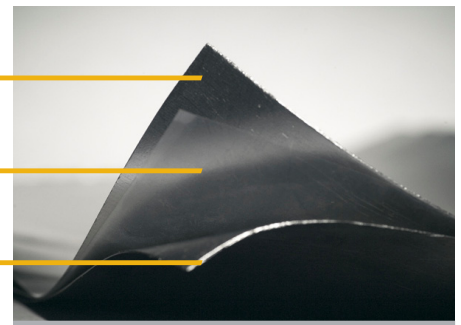

While maintaining an effective seal, GRAFOIL material exhibits virtually no creep relaxation. As a result, the need for periodic bolt tightening is greatly reduced.

Laminate Construction

- 1) GRAFOIL Grade TG-337 (per Technical Data Sheet 183)
- 2) 0.0015" thick plastic
- 3) GRAFOIL Grade TG-337 (per Technical Data Sheet 183)

NOTE: The plastic interlayer is primarily present to provide toughness in handling and can be expected to burn or melt away at elevated temperatures, leaving the GRAFOIL flexible graphite facing to provide the long-term seal.

Typical Properties*

Characteristic	Value
Thickness of Laminate	0.030" (0.76 mm) Standard 0.060" (1.52 mm) Standard Non-standard thicknesses may be available upon request
Width	39.4" (1000 mm) Standard Non-standard widths may be available upon request
Length	39.4" (1000 mm) Standard 100' (30.5 m) Standard Non-standard lengths may be available upon request
Bulk Density (Graphite)	62.4 lb/ft ³ (1.0 g/cc) Standard Non-standard densities may be available upon request
Compressibility at 5000 psi (35 MPa) load	50%
Recovery after 5000 psi (35 MPa) load	11% Typical
Creep Relaxation Method: BSI-F125 at 6391 psi (44.1 MPa) load up to 400°C	<4% Typical for 70 lb/ft ³
Tensile Strength	450 psi (3.1 MPa) Typical
Temperature Use Range	-400°F to 750°F (-240°C to 400°C)

Notes:
* Properties listed are typical and cannot be used as accept/reject specifications.

ASME Gasket Factors

- "m" Factor: 2
- "y" Stress: 900 psi (6.22 MPa)
- Max Gasket Unit Load: 24,000 psi (165.87 MPa)

Comparison to Compressed Sheet and Beater Addition Gasketing Materials

GRAFOIL Grade GHN laminate material outperforms other materials because:

- It is composed of GRAFOIL flexible graphite facing. The GRAFOIL graphite facing has no binders, fillers, or additives and is capable of withstanding extreme temperatures (to 3000°C) with no degradation. Other materials have binders that become the weakest link in the temperature chain. GHN material will not break down over time and get brittle and dry out. It will not lose water of crystallization.
- It has a center layer of plastic that provides toughness for handling so it is not as fragile as unsupported flexible graphite. The center layer is extremely thin (0.0015”) and disintegrates at elevated temperatures, leaving only the GRAFOIL material in the joint. This means GHN flexible graphite is strong enough to handle but remains as flexible graphite for a long-term seal.
- It is inert and impervious to most fluids and chemicals. This means GHN materials won't break down and fall apart.
- It seals at low flange loads where other materials require higher loading to seal.
- It removes cleanly and does not bond itself to the flanges.
- NO gasket sealants are required, saving assembly time, effort, and expense.

+1 (800) 253-8003 (Toll-Free in USA)
+1 (216) 529-3777 (International)

www.graftech.com | www.grafoil.com
grafoil@graftech.com

Redefining limits

© 2011 GrafTech International Holdings Inc. This information is based on data believed to be reliable but GrafTech makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties but should not be used to establish specification limits or used alone as the basis of design. GrafTech's liability to purchasers is expressly limited to the terms and conditions of sale. GRAFOIL, EXPANDOGRAF, GRAFKOTE, GTS, RIBBON-PACK and SUPER GTO are registered trademarks of GrafTech International Holdings Inc. GRAFOIL flexible graphite materials, and processes are covered by several US patents. For patent information visit www.grafoil.com/patents.